

Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System





TABLE OF CONTENTS

Chapter	Page
1 DESCRIPTION	1-1
2 SPECIFICATIONS 2.1 System Performance 2.2 Controls 2.3 Communications	2-1 2-1 2-4 2-4
2.4 Physical Characteristics2.5 Electrical Requirements2.6 Environmental2.7 Connector/Pin Details	2-5 2-5 2-5 2-6
3 SET-UP	3-1
3.1 Mounts	3-1
3.2 Connections	3-1
3.3 Set-up Procedure	3-2
3.4 Heating and Cooling	3-3
4 OUTLINE DRAWING	4-1
LIST OF FIGURES	
Figure 3-1: Mounts	3-1
Figure 3-2: Connections	3-2
Figure 4-1: Outline Drawing	4-1



File: PS-RMU-S-1836-B 1 Autl	uthor(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page i
------------------------------	--------------	----------------	-------------------	--------



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

1 DESCRIPTION

Laserdyne's Black Opal displays have been engineered for a wide range of land-, sea- or air-borne display applications including remote/indirect viewing of video images generated by day, night or thermal cameras.

The Xtreme Land mini 6 model is a 6.5" [with XGA (1,024 x 768) resolution] version of the Black Opal display type, specially designed for land vehicle use, and made compact to fit space-limited installations.

This is a reduced weight/reduced cost model, where some of the stringent measures specific to air and seaborne operations have been relaxed. It retains the advanced video features and generally high level of ruggedisation for which Black Opal displays are renowned.

This model is fitted with a high brightness LED backlight module. LED backlighting improves reliability when compared with standard CCFL (lamp) backlights – not only by substituting solid-state components for fragile lamps, but also by the graceful nature of LED backlight degradation as the unit ages – a missing lamp may make an LCD unreadable, but a few fading LEDs make little difference.

Each Xtreme Land model consists of a LED backlit LCD, a low reflection high clarity window, a microprocessor unit, and power & control electronics. All items are housed within a rugged enclosure containing heating and cooling mechanisms. The LCD is protected by a tough, antireflection-coated window which also provides EMI/EMC shielding. The window is matched to the LCD glass with index-matched materials to minimise internal reflections, eliminating potential internal window fogging and maximising window strength. All models are button operated.

Each model features MultiVision, allowing for multiple analogue and SDI video inputs (for SD, HD and other analogue video formats, and PC RGB inputs), and providing simultaneous display of up to 6 inputs.

Images are displayed on a LED backlit LCD that may be viewed in full direct sunlight down to full darkness and feature backlight settings suitable for low light viewing, for viewing with Night Vision Devices and completely off for black-out conditions.

Black Opal displays have several features designed to increase the effectiveness of surveillance, sighting and security systems, including:

Image Enhancement: video inputs are compensated for obscuration (e.g. rain, fog, snow, mist or smoke) within an adjustable central window where contrast and colour are enhanced. For a chosen window size, the enhancement is applied to that portion of the <u>displayed</u> image;

Digital Zoom: a fully X & Y interpolated "smart" zoom, not merely pixel multiplying, yields a clear zoomed image without the blocky "pixelated" appearance often seen with digital zooming; and

Freeze Frame: freezes the current prime video channel while leaving live any video inset.

Colourisation: applies preloaded colour palettes to monochrome imagery.

Motion ("edge tearing") compensation: minimises the jagged edges that can occur with motion in video on LCDs.

These displays also provide overlay (chroma keying) capability.

Black Opal display software is easily upgradeable, upgrades can be downloaded in the field via a PC

File: PS-RMU-S-1836-B_1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 1-1



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

2 SYSTEM SPECIFICATIONS

Notation - use of brackets in tables: [notes & qualifications] (units) {alternate units}.

2.1 System Performance

PARAMETER		SPECIFICATION	
	ion		
Xtreme Land mini 6		Black Opal airborne special – land vehicle dedicated design, 6", compact, high brightness, XGA resolution	
	Contro	ol .	
Control Functions [factory configurable to customer requirements]		On/Off; backlight intensity; menu select; select screen lay-out; select image enhancement feature; digital zoom; freeze frame; night day toggle	
Controls		7 tactile LED-backlit buttons	
	Displa	у	
Туре	122	Active Matrix Colour (24-bit colour) LED backlit LCD Module	
Display Size (" {cm})	diagonal	6.5 {16.51}	
	active area	5.2 {13.2} x 3.9" {9.9}	
Aspect Ratio [width:height]	gifts	4:3	
Pixel Number [1 pixel is RGB trio]	30 . 4	1,024 x 768	
Colour		16 Million [8-bit each colour]	
Grey Scale		256 [8-bit]	
Backlight Luminance [LED type;	minimum	0	
approx.; adjustable] (cdm ⁻²) ¹	maximum	≈ 1,000 [800 typical]	
Contrast Ratio [limiting; LCD]		600:1	
Response Time [typical] (ms)		25 [T _r =6; T _f = 19]	
Readability [ambient conditions]		black-out to full direct sunlight [10 ⁵ lux]	
Night Vision Device compatible?		yes [low intensity green]	
Viewing Angle	vertical	±80	
[full angle] (°)	horizontal	+80/-60	

 $^{^{1}}$ 1 cdm $^{-2}$ = 1 nit.



				1
File: PS-RMU-S-1836-B_1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 2-1



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

re	Inputs ow esolution	
re	~	
,	roup	4 simultaneous channels, each channel being either 1 x Y/C or 2 x CVBS
Physical Connections R	igh esolution roup	1 simultaneous channel, selectable from 6 general purpose analogue inputs. Connections supported are 6 x CVBS, or 3 x Y/C, or 2 x YPrPb, or 2 x RGsB, or 2 x RGBHV.
Si	DI group	1 simultaneous channel, selectable from 2 inputs
re	ow esolution roup	Standard definition (SD) only: (PAL/NTSC/SECAM/CCIR-601/RS170; interlaced and non-interlaced)
		SD using CVBS or Y/C: (PAL/NTSC/SECAM/CCIR-601/RS170; interlaced and non-interlaced)
Sinnal Formats supported	igh esolution	HD using YPrPb or RGB: (720p, 1080i, 1080p);
	group	PC RGB input: VESA RGB analogue (UXGA maximum resolution)
		Other analogue video standards supported on request (i.e. STANAG 3350)
SI	DI group	SMPTE 259M, SMPTE 292M (SMPTE 424M optional)
re	ow esolution roup	CVBS, Y/C. All analogue inputs are 75ohm terminated
Connection Formats re	igh esolution roup	CVBS, Y/C, YPrPb, RGBHV, RGsB. All analogue inputs are 75ohm terminated.
Si	DI group	SD-SDI, HD-SDI (3G-SDI optional). BNC, 75 ohm.
	Output	s
	nalogue	1 output channel, available from 3 general purpose analogue outputs. Connections supported are SD: (CVBS and Y/C simultaneous) or RGB or YPrPb; or
Physical Connections	utput group	HD: YPrPb or RGB or
,		PC: RGBHV/RGsB [XGA maximum resolution]
		All analogue outputs are 75ohm
	DI output roup	2 x BNC, 75ohm

File: PS-RMU-S-1836-B_1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 2-2



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

PARAMETER		SPECIFICATION
		SD: PAL/NTSC/SECAM/CCIR-601/RS170
	Analogue	HD: SMPTE 274M 1080p30, 1080i60, 720p60
Signal Formats supported	output group	(maximum resolution)
		PC: VESA (XGA maximum resolution)
	SDI group	SMPTE 259M, SMPTE 292M (SMPTE 424M optional)
	Analogue output group	CVBS, Y/C, YPrPb, RGBHV, RGsB
Connection Formats		Output 1: Re-clocked copy of the selected SDI input channel (same format as the input)
	SDI group	Output 2: Configurable to be either (a) any other video input (same format); or (b) A specified format
4	Analogue output group	Configurable to be either (a) pass through any other video input (with a compliant format); or (b) a specified format and image configuration using any of the available inputs (limits apply)
Functionality		Output 1: Re-clocked copy of the selected SDI input channel (same format as the input)
	SDI group	Output 2: Configurable to be either (a) pass through any other video input (with a compliant format); or (b) a specified format and image configuration using any of the available inputs (limits apply)
	Safety & Pro	tection
Cooling		thermal transfer by internal and external convection
Display Window		Antireflection, hard-coated, sealed, EMI/EMC shielded; index-matched to LCD glass
1925		conforms to:
		QSTAG 307;
Electrical Protection		MIL-STD-704E;
		MIL-STD-1275D;
		STANAG 3350 (all analogue video inputs)
		RTCA/DO-160D, Category Z, power input 18 to 30.3Vdc [min. max. & emergency operation, interrupts, abnormal surge (48Vdc for 1s), engine starting undervoltage];
		RTCA/DO-160D, Category A, voltage spike [600Vdc for 10μs]



File: PS-RMU-S-1836-B_1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 2-3



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

PARAMETER		SPECIFICATION
Audible Emission [@ ≥ 10m]		nil
	Suppor	rt
MTBF [@30°C; 100%	Ground Mobile [wheeled]	> 14,700
duty cycle] (hours) Airborne Rotary Winged		> 6,500
Operational Life (years)		10

2.2 Controls

Control	Loo	ation.	La	abel	Primary Function		
Type	Loca	ation	Primary	Secondary			
Button		left		Ö	menu	toggle between active and standby	
Button		2 nd left	0	☆ (show assigned screen lay-outs for selection	toggle between Day and Night backlight modes	
Button	bottom of	3 rd left	2	2	1	enhance	
Button	front face	middle				zoom	1
Button		3 rd right	A STATE OF THE STA		freeze		
Button		2 nd right	Δ		backlight up; scroll/adjust up		
Button		right	V		backlight down; scroll/adjust down		

2.3 Communications

PARAMETER		SPECIFICATION
Ports		three Serial ports (maximum)
Data	Format 2 x RS-232, 1 x RS-422 (other configuration available on request – maximum capacity is RS422 or 4 x RS232)	
	Rate (Baud)	115200,n,8,1 standard, others available on request



File: PS-RMU-S-1836-B 1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 2.4
FIIE. P3-KIVIU-3-1030-D_1	Author(S). TVV	Authorisea: I W	Rev. Date. 9.7.13	Page 2-4



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

2.4 Physical Characteristics

PARAMETER			SPECIFICATION
Mass [approx.] (kg)			1.4
Dimensions	Width	body	160
(mm)		overall ²	170
	Height	body	135
		overall ²	145
	Depth ³	body	56.15
		overall ²	80.9
Mounting		Panel Mount	4 x 4.4mm diameter holes in corners
		Side Mount	4 x M4 tapped holes, 6mm deep, on each side
		Rear Mount	VESA 75 type, 4 x M4 tapped holes, 8mm deep

2.5 Electrical Characteristics

PARAMETER		SPECIFICATION	
Supply Voltage (Vdc) [MIL-STD-704C]		18 to 33 [28 nominal]	
Current Drain	heater on	< 2.5	
[@ 28Vdc; typical] (A)	heater off	< 1.5	

2.6 Environmental

PARAMETER		SPECIFICATION	
Temperature (°C) Operate 4	min. ⁵	-40	
[MIL-STD-810F,	max. ⁶ long term	+55	
Method 501.4;	short term	+71	
Method 502.4, Survive	min. ⁵	-40	
Procedures I, II]	max. ⁶	+71	
Thermal Shock [MIL-STD-810F, Mehtod 503.4, Procedure II] (°C in ≤ 1 minute)		-30 to +50	
Vibration [MIL-STD-810F, Method 514.5, Procedure I, Category 20 ground vehicle wheeled and tracked]		spectra as per figure 514.5C-4; 10Hz to 2kHz; 4 hours per axis	
Shock [MIL-STD-810F, Method 9	516.5, Procedure I]	40g, 11ms each direction for each axis, half-sine	

² Including mounting flange.³ Excluding connectors.



File: PS-RMU-S-1836-B_1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 2-5

⁴ When used in accordance with procedures in User's Manual.

⁵ Without wind-chill.

⁶ Without solar radiation.



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

PARAMETER	SPECIFICATION
Sealing [MIL-STD-810F, Method 512.4, Procedure I] ⁷	full immersion
Altitude/Low Pressure [transport; MIL-STD-810F, Method 500.4, Procedure I]	15,000 feet
EMI/EMC 7,8	MIL-STD-461D

2.7 Connector/Pin Details

No.	Name	Pin Marking	Purpose	Notes for Harness			
J1: I	J1: Power & Comms Connection: Connector, MilSpec, 38999/24WB35PN, 11-35, Panel, Plug, 'click' screw-on, 13 Way						
J1-1	DC+	1	Power input, +28V nominal	3A maximum current			
J1-2	0V	2	Power return	3A maximum current			
J1-3	GND1	3	Communication channel 1 GND	Common for TX/RX for comm. channel 1;			
J1-4	TX1/TX1-	4	RS232 TX1, or RS422 TX1-	Dual purpose comm. channel 1			
J1-5	TX1+	5	RS422 TX1+	Used if RS422 interface is selected for comm. channel 1			
J1-6	RX1/RX1-	6	RS232 RX1, or RS422 RX1-	Dual purpose, comm. Channel 1			
J1-7	RX1+	7	RS422 RX1+	Used if RS422 interface is selected for comm. Channel 1			
J1-8	TX2/TX2-	8	RS232 TX2, or RS422 TX2-	Dual purpose comm. Channel 2			
J1-9	RX2/RX2-	9	RS232 RX2, or RS422 RX2-	Dual purpose, comm. Channel 2			
J1-10	GND2	10	Communication channel 2 GND	Common for TX/RX for comm. Channel 2;			
J1-11	GND3	11	Communication channel 3 GND	Common for TX/RX for comm. Channel 3;			

⁷ With compliant line connectors attached.



File: PS-RMU-S-1836-B_1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 2-6

⁸ Refer to manufacturer for details.



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

No.	Name	Pin Marking	Purpose	Notes for Harness					
	J1: Power & Comms Connection (cont'd)								
J1-12	TX3/TX2+	12	RS232 TX3, or RS422 TX2+	Dual purpose comm. Channel 2/3. RS422 (on comm. Channel 2) and RS232 (comm. channel 3) are mutually exclusive as they share common pins.					
J1-13	RX3/RX2+	13	RS232 RX3, or RX422 RX2+	Dual purpose comm. Channel 2/3. RS422 (on comm. Channel 2) and RS232 (comm. channel 3) are mutually exclusive as they share common pins.					
J2: S	D Video In/Out Co	nnection:	Connector, MilSpec, 38999/2 screw-on, 22 Way	4WC35SN, 13-35, Panel, Socket, 'click'					
J2-1	Y1/CVBS1	1	Video channel 1 luma/composite signal	75 ohm terminated					
J2-2	C1/CVBS5	2	Video channel 1 chroma signal/second composite signal for channel 1	75 ohm terminated					
J2-3	Y2/CVBS2	3	Video channel 2 luma/composite signal	75 ohm terminated					
J2-4	C2/CVBS6	4	Video channel 2 chroma signal/second composite signal for channel 2	75 ohm terminated					
J2-5	Y3/CVBS3	5	Video channel 3 luma/composite signal	75 ohm terminated					
J2-6	C3/CVBS7	6	Video channel 3 chroma signal/second composite signal for channel 3	75 ohm terminated					
J2-7	Y4/CVBS4	7	Video channel 4 luma/composite signal	75 ohm terminated					
J2-8	C4/CVBS8	8	Video channel 4 chroma signal/second composite signal for channel 4	75 ohm terminated					
J2-9	Out1	9	CVBS output (SD), or Y/G output (HD/PC)	Video output, 75 ohm impedance.					
J2-10	GND_Out1	10	Video output 1 GND	Return for Out1					
J2-11	Out2	11	Luma output (S-VIDEO), or Pb/B output (HD/PC)	Video output, 75 ohm impedance.					



File: PS-RMU-S-1836-B_1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 2-7



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

No.	Name	Pin Marking	Purpose	Notes for Harness					
	J2: SD Video In/Out Connection (cont'd)								
J2-12	GND_Out2	12	Video output 2 GND	Return for Out2					
J2-13	Out3	13	Chroma output (S-Video), or Pr/R output (HD/PC)	Video output, 75 ohm impedance.					
J2-14	GND_Out3	14	Video output 3 GND	Return for Out3					
J2-15	GND1	15	Video channel 1 GND	Common for Y1 and C1					
J2-16	GND2	16	Video channel 2 GND	Common for Y2 and C2					
J2-17	GND3	17	Video channel 3 GND	Common for Y3 and C3					
J2-18	GND4	18	Video channel 4 GND	Common for Y4 and C4					
J2-19	HS_Out	19	Horizontal sync output	Synchronisation signal if sync-on-green or sync-on-Y is not used.					
J2-20	VS_Out	20	Vertical sync output	Synchronisation signal if sync-on-green or sync-on-Y is not used.					
J2-21	Sync_GND	21	HS,VS Ground	Common for HS and VS signals					
J2-22	Dimming	22	Analog Input, used to externally control the backlight (if enabled)	0 to 32V range, maximum detected input is 60V.					
J3: H	D Video Connection	n: Connec	tor, MilSpec, 38999/24WC35 22 Way	PN, 13-35, Panel, Plug, 'click' screw-on,					
J3-1	GREENA1		Analog video input: GreenA1 / YA1 / YA1/ CVBSA1 input	75 ohm terminated. Use as Green for PC input (with pins 3 and 5). Also can be used as Y for component (with pins 3 and 5 for Pr, Pb), Y for s-video (with pin 7 for chroma), or as a CVBS input					
J3-2	GREENA1_GND	2	GND return for pin 1						
J3-3	BLUEA1	3	Analog video input: BlueA1 / PbA1 / YA2/ CVBSA2 input	75 ohm terminated. Use as Blue for PC input (with pins 1 and 5). Also can be used as Pb for component (with pins 1 and 5 for Y, Pr), Y for s-video (with pin 9 for chroma), or as a CVBS input					
J3-4	BLUEA1_GND	4	GND return for pin 3						



File: PS-RMU-S-1836-B 1	Author(s): TM	Authorised: TW	Pov Data: 0.7.13	Page 2.8
FIIE. P3-KIVIU-3-1030-D_1	Author(s): TW	Authorisea: I W	Rev. Date: 9.7.13	Page 2-8



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

No.	Name	Pin Marking	Purpose	Notes for Harness				
	J3: HD Video Connection (cont'd)							
J3-5	REDA1	5	Analog video input: RedA1 / PrA1 / YA3/ CVBSA3 input	75 ohm terminated. Use as Red for PC input (with pins 1 and 3). Also can be used as Pr for component (with pins 1 and 3 for Y, Pb), Y for s-video (with pin 11 for chroma), or as a CVBS input				
J3-6	REDA1_GND	6	GND return for pin 5					
J3-7	REDA2	7	Analog video input: RedA2 / PrA2 / CA1/ CVBSA4 input	75 ohm terminated. Use as Pr for HD input (with pins 9 and 11). Also can be used as Red (with pins 9 and 11), C for s-video (with pin 1 for luma), or as a CVBS input				
J3-8	REDA2_GND	8	GND return for pin 7					
J3-9	BLUEA2	9	Analog video input: BlueA2 / PrA2 / CA2/ CVBSA5 input	75 ohm terminated. Use as Pb for HD input (with pins 7 and 11). Also can be used as Blue (with pins 7 and 11), C for s-video (with pin 3 for luma), or as a CVBS input				
J3-10	BLUEA2_GND	10	GND return for pin 9					
J3-11	GREENA2	11	Analog video input: GreenA2 / YA2/ CA3/ CVBSA6 input	75 ohm terminated. Use as Y for HD input (with pins 7 and 9). Also can be used as Green (with pins 7 and 9), C for s-video (with pin 5 for luma), or as a CVBS input				
J3-12	GREENA2_GND	12	GND return for pin 11					
J3-13	DDC_SCL	13	DDC channel clock (RGB1)	Optional				
J3-14	DDC_SDA	14	DDC channel data (RGB1)	Optional				
J3-15	HSA1	15	Horizontal Sync, for RGB A1	TTL level				
J3-16	VSA1	16	Vertical Sync, for RGB A1	TTL level				
J3-17	GNDA1	17	GND for HSA1, VSA1					
J3-18	HSA2	18	Horizontal Sync, for RGB A2	TTL level				
J3-19	VSA2	19	Vertical Sync, for RGB A2	TTL level				



File: PS-RMU-S-1836-B 1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 2-9
1 11C. F3-KWO-3-1030-D_1	Author(s). TVV	Authoriseu. TVV	Nev. Date. 3.7.13	raye 2-9



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

No.	Name	Pin Marking	Purpose	Notes for Harness			
J3: HD Video Connection (cont'd)							
J3-20	GNDA2	20	GND for HSA2, VSA2				
J3-21	DDC_+5V	21	DDC channel +5V	Optional			
J3-22	DDC_GND	22	DDC channel GND	Optional			
		J4: Ear	th Point Connection: M5 the	readed stud			
J5: N	lisc. Connection: (Connector,	MilSpec, 38999/24WC35PA, Way	13-35, Panel, Plug, 'click' screw-on, 22			
J5-1	TX+	1	Ethernet TX+ pin 1	Fully protected against transients.			
J5-2	TX-	2	Ethernet TX- pin 2	Fully protected against transients.			
J5-3	RX+	3	Ethernet RX+ pin 3	Fully protected against transients.			
J5-4	RX-	4	Ethernet RX- pin 6	Fully protected against transients.			
J5-5	SHIELD	5	Shield for Ethernet (chassis)	tied to chassis			
J5-6	USB_+5V	6	USB Pin 1	factory configured, ESD protection only			
J5-7	USBDATA	7	USB Pin 2	factory configured, ESD protection only			
J5-8	USB_+DATA	8	USB Pin 3	factory configured, ESD protection only			
J5-9	USB_GND	9	USB Pin 4	factory configured, ESD protection only			
J5-10	Audio_L_in	10	Audio input, Left	Fully protected against transients.			
J5-11	Audio_R_in	11	Audio input, Right	Fully protected against transients.			
J5-12	Audio_L_out	12	Audio output, Left	Fully protected against transients.			
J5-13	Audio_R_out	13	Audio output, Right	Fully protected against transients.			
J5-14	Audio GND.	14	Common for audio	tied to chassis			
J5-15	PS2_DATA	15	PS2 pin 1, or USBOTG D+	factory configured, ESD protection only			
J5-16	PS2_GND	16	PS2 pin 3, or USBOTG GND	factory configured, ESD protection only			
J5-17	PS2_VCC	17	PS2 pin 4, or USBOTG VBUS	factory configured, ESD protection only			
J5-18	PS2_CLK	18	PS2 pin 5, or USBOTG D-	factory configured, ESD protection only			
J5-19	Audio_GND_IN	19		tied to chassis			
J5-20	Audio_GND_OUT	20		tied to chassis			



File: PS-RMU-S-1836-B 1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 2-10
-------------------------	---------------	----------------	-------------------	------------



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

No.	Name	Pin Marking	Purpose	Notes for Harness			
	J5: Misc. Connection (cont'd)						
J5-21	spare1	21	unused, or Ethernet LED+ for SPD LED, or USBOTG ID	factory configured, ESD protection only			
J5-22	spare2	22	unused, or Ethernet LED+ for LINK LED.	factory configured, ESD protection only			
		J6: SDI	Input #1 Connection: Conn	nector, BNC			
	SDI In1		SDI input #1 for SD-SDI, HD-SDI (3G-SDI optional)	75 ohm BNC. Cable must comply with loss requirements of SMPTE 292M.			
		J7: SDI	Input #2 Connection: Conn	nector, BNC			
	SDI In2		SDI input #2 for SD-SDI, HD-SDI (3G-SDI optional)	75 ohm BNC. Cable must comply with loss requirements of SMPTE 292M.			
		J8: SDI	Output #1 Connection: Con	nector, BNC			
	SDI Out1	-	Selected SDI input e- clocked Output	75 ohm BNC. Cable must comply with loss requirements of SMPTE 292M.			
	J9: SDI Output #2 Connection: Connector, BNC						
	SDI Out2		Generated SDI output (SD-SDI, HD-SDI (3G-SDI optional)	75 ohm BNC. Cable must comply with loss requirements of SMPTE 292M.			



File: PS-RMU-S-1836-B 1	Author(a): TM	Authorised: TW	Pov. Doto: 0.7.12	Dogo 2 11
FIIE. P3-KIVIU-3-1030-D_1	Author(s): TW	Authorised: IW	Rev. Date: 9.7.13	Page 2-11



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

3 SET-UP

3.1 Mounts

The unit has three mounting methods:

- 1. Panel Mount: one 4.4mm diameter hole in each corner of the front bezel.
- 2. Side Mount: four M4 tapped holes, 6mm deep, on each side of the rear section.
- 3. Rear Mount: VESA 75 type, four M4 tapped holes, 8mm deep, on the rear face of the unit.

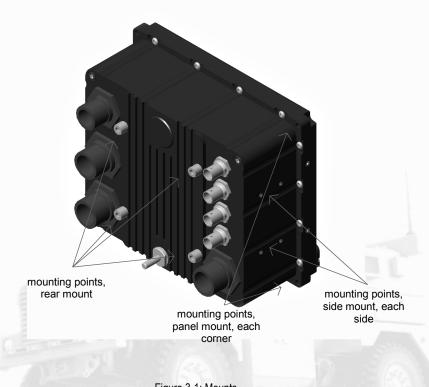


Figure 3-1: Mounts

3.2 Connections

The unit has nine connection points located on the rear:

Connector J1, the Power & Comms connection;

Connector J2, the SD Video In/Out connection;

Connector J3, the HD Video connection;

Connector J4, the Earth Point connection;



File: PS-RMU-S-1836-B 1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 3-1



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System


Connector J5, the Miscellaneous connection;

Connector J6, the SDI Input #1 connection;

Connector J7, the SDI Input #2 connection;

Connector J8, the SDI Output #1 connection; and

Connector J9, the SDI Output #2 connection.

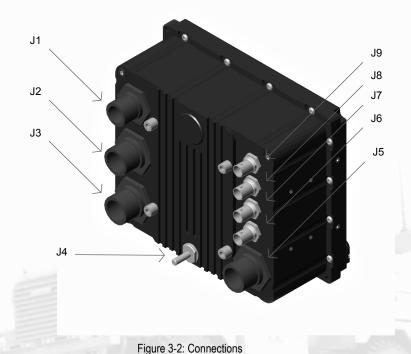

3.3 Set-up Procedure

CAUTION: User-supplied cables must be correctly wired (see list of Connector/Pin Details).

Ensure that external power is within the range specified herein.

Ensure that external power is OFF before proceeding with set-up.





Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

- Mount the unit to the vehicle or platform, using one of the mounting methods provided.
- Connect the earth point on the unit to an appropriate point on the vehicle.
- Connect the required cables for video in/out to the unit and to the external imaging system(s).
- Connect the required power/data cable to the unit and to the external power source, and to the communication data source.

3.4 Heating and Cooling

The unit contains internal heating and cooling mechanisms that are triggered at certain internal temperatures.

The approximate warm-up rate is 17s/°C (e.g. with starting internal temperature of -40°C, unit will power up in about 11 minutes; with starting internal temperature of -25°C, unit will power up in about 7 minutes).

Once the unit has warmed it will operate normally provided that the ambient temperature stays within the specified operating temperature range.

The operating procedures, internal temperatures and resulting operating conditions are shown in the following table.

Ambient	Procedure	Internal	Operating Condition
Temp. (°C)	de not ettement te en erete unit	Temp. (°C)	
<u> </u>	do not attempt to operate unit		
-40 to 0	de-ice unit prior to start-up	≤ 0	unit will not power up; heater on
	1000	> 0	unit will power up; internal convection on
0 to +55	none	≥ 10	heater off
	TRIPLE	≥ 55	backlight reduces
+55 to +70	provide forced air cooling (e.g. fan)		
> +70	do not attempt to operate unit	≥ 75	unit will not power up



File: PS-RMU-S-1836-B_1	Author(s): TW	Authorised: TW	Rev. Date: 9.7.13	Page 3-3



Black Opal Xtreme Land mini 6 Ground Mobile Special Flat Panel Display System

4 OUTLINE DRAWING

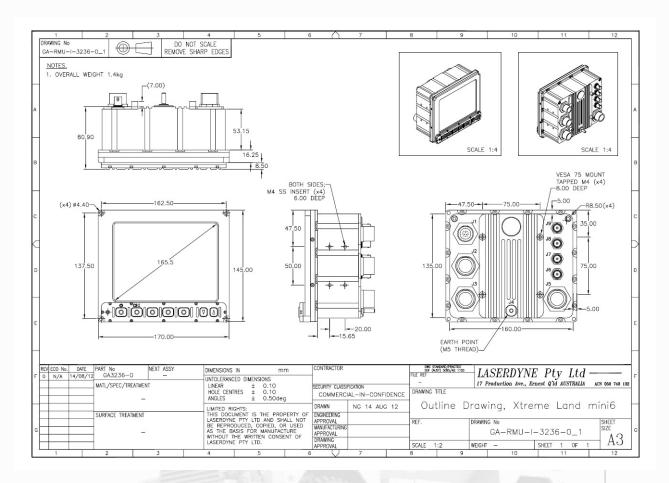


Figure 4-1: Outline Drawing



A Division of Laserdyne Pty Ltd A.C.N. 053 743 132

17 Production Ave Molendinar Queensland 4214 Australia

email: laserdyne@laserdyne.com.au website: www.laserdyne.com.au

The information contained herein is proprietary to Laserdyne Pty Ltd. No part of this work may be reproduced or copied in any way without prior written permission of Laserdyne Pty Ltd. Note: specifications herein are subject to change without notice.

